


SHALLOW-DIG FLAT TANKS


- Lightweight, easily handled
- Low installation cost
- Strong, stable design
- Available with or without integral filter
- Ideal for retrofit in existing gardens
- Can be installed in ground water up to tank shoulder
- Available in four sizes from 1500 to 7500 litres
- Vehicle bearing covers available
- 25 year warranty

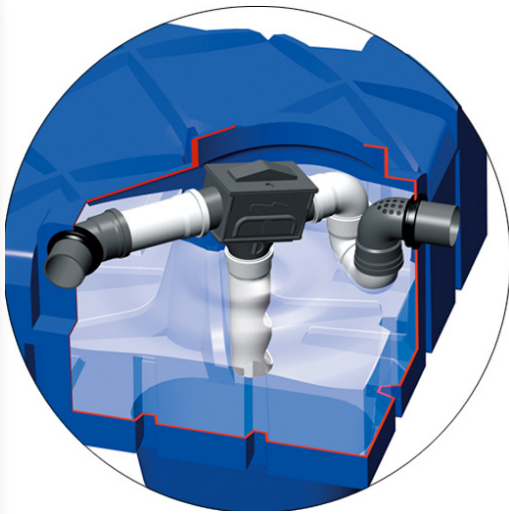

Integral 0.8mm filter unit complete with calmed inlet and trapped overflow.

Rewatec F-Line flat tanks

A range of one-piece polyethylene tanks, designed to minimise the excavation work required, resulting in reduced installation cost and time, and less excavation material to dispose of. These tanks also have the advantage of requiring no concrete backfill. With the correct cover and shaft extension, the tanks can be installed within a trafficked area (up to 2.2t axle load).

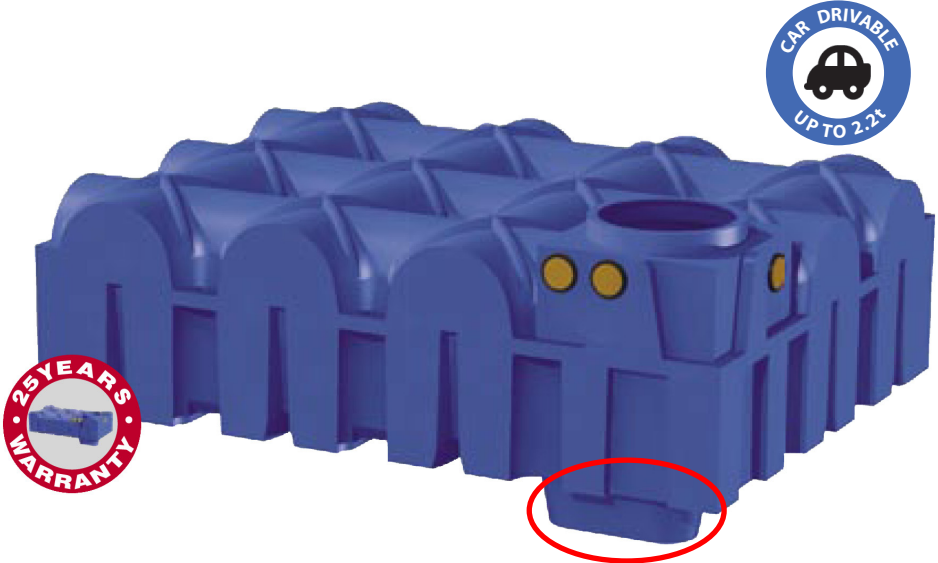

1500L, 3000L & 5000L models have an integral pump sump. This gives a greater effective volume as the amount of residual water is reduced. More of the water can therefore be extracted by the pump.



Flexible System Design

Our comprehensive range of specialist items has been developed specifically for Rainwater Harvesting Systems. Because the range consists of separate components, it has exceptional flexibility.

We supply equipment suitable for almost any system design, whether you're planning a system for a small house, school or large industrial or commercial premises.



We are the UK distributor and main stockist of Wisy® products for rainwater utilisation




Products shown with this logo are included on the Water Technologies List making them eligible for Enhanced Capital Allowance.

F-LINE SHALLOW-DIG TANKS

Four sizes are available:

| | Length | Width | Height to tank shoulder | Weight |
|-------|--------|--------|-------------------------|--------|
| 1500L | 2400mm | 1200mm | 650mm | 80kg |
| 3000L | 2400mm | 2400mm | 650mm | 160kg |
| 5000L | 2960mm | 2220mm | 920mm | 250kg |
| 7500L | 3340mm | 2310mm | 1125mm | 310kg |

5000L and 7500L tanks can be linked together to provide 10,000L and 15,000L volumes respectively.

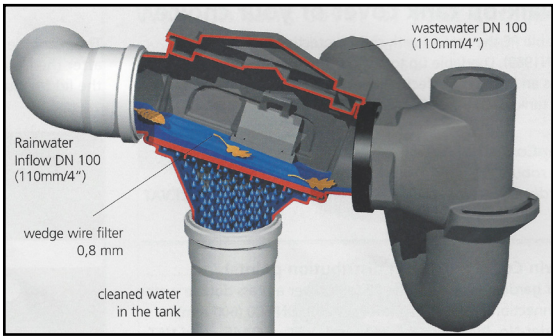

Built-in filter complete with calmed inlet and overflow trap.

Standard tank cover. Twin walled for improved frost protection. Lockable & child-proof



600mm diameter risers extend the shaft to required ground level and provide the surround for the cover. Complete with rubber seal to ensure watertight fit. Available in two heights; 250mm and 635mm (can be reduced by cutting). For increased depth, the optional spacer ring can be used.





Drivable package: Steel cover, 600mm riser plus 600mm spacer ring. Maximum axle load 2.2t



Adjustable 700-1100mm

F-line tanks are made with safety in mind. The standard access cover has a secure child-proof locking mechanism.



For garden only systems, the alternative twin cover has a pull out centre which gives access to two snap-fit connectors. Simply open the tap to start the pump.



Distributor:

Rainharvesting Systems Ltd.
 The Green Shop, Calf Way,
 Bisley, Stroud,
 Gloucestershire GL6 7BX
 Tel: 0845 223 5430
 Fax: 01452 772008
 E-mail: sales@rainharvesting.co.uk
 Website: www.rainharvesting.co.uk

NB continuous development may necessitate change in these details without notice E&OE.