

# MAXIMA Rainwater Processor Unit

- Hybrid control unit provides a pressurised system with an integral break tank
- Delivered as a fully assembled unit for simple plug-in installation
- Fully automatic operation
- Integral mains water top-up via compliant AA air gap
- Large 100-litre buffer storage
- Low noise, smooth running internal submersible pump
- Supplied complete with high-flow submersible transfer pump with integral float switch and floating suction filter
- Can be manually switched to mains water only
- Low maintenance, high reliability
- Tough polyethylene housing
- High quality construction, all fittings of brass or stainless steel

The *Maxima* Hybrid Rainwater Processor Unit from *Wisy AG* has a number of distinct advantages over conventional systems. The main one being that its installation is so simple.

It is ideal for smaller commercial properties or for supplying several properties from one common storage tank; perfect for apartment blocks.

The main unit consists of a 100L chamber that acts as a 'buffer' vessel to hold a small store of water which is pumped on demand to WCs and other outlets. The chamber houses a multi-stage submersible pressure pump. The unit is a complete package with all controls built in and ready to operate.



The unit is supplied complete with a separate submersible pump for the rainwater storage tank. This transfer pump is fitted with an integral float switch and floating suction filter. Controlled remotely by the *Maxima* unit, the transfer pump keeps the chamber supplied with rainwater. When rainwater is no longer available, then the *Maxima* chamber switches over to using wholesome water from the built-in mains top-up unit.

Available in two versions, with either 75 or 125 litres per minute pumping capacity.



## Flexible System Design

Our comprehensive range of specialist items has been developed specifically for Rainwater Harvesting Systems. Because the range consists of separate components, it has exceptional flexibility.

These items are suitable for almost any system design, whether you're planning a system for a small house, school or large industrial or commercial premises.



We are founder members of the UK Rainwater Harvesting Association.



We are the UK's sole agent and distributor of *Wisy* products for rainwater utilisation.

# Maxima - Designed for Simplicity

## Pump controller

The 'Controlmatic' pump controller provides automatic operation of the internal pump. The switch on pressure is adjustable.

## Isolating valve

The manual isolating valve on the mains water supply connection has an integral strainer to protect the solenoid valve from debris.

## Solenoid valve / tundish arrangement

The mains water connection is fully assembled with 230v solenoid valve and stainless steel tundish provide type AA air gap

## Overflow

High capacity 100mm overflow connection.

## Control panel

The control panel has electrical connections for the transfer pump, the solenoid valve and the internal pump (via the 'Controlmatic' unit).

## Internal pressure pump

The multi-stage internal pump provides a pressurised supply to the points of consumption.

## Drain valve

The 100-litre buffer storage can be easily and fully drained for service and maintenance.

## Non return valve

1" brass non-return valve on the inlet connection from the transfer pump.

The Maxima unit has been designed to enable a very quick and simple installation of the rainwater harvesting plant. As the unit has a diameter of only 400mm, its compact footprint makes it suitable for small plantrooms or even within a cupboard.


As it is almost entirely pre-assembled, there is very little fitting time required, with the subsequent saving in labour costs. Its just a matter of joining the connecting pipework and plugging in to a standard 230v power supply. No further internal work is required.

## Transfer pump

The Maxima unit is supplied complete with a submersible transfer pump. Located in the rainwater storage tank, this supplies water on demand to the Maxima buffer vessel. When no rainwater is available, the integral float switch isolates this pump. The floating suction filter ensures no particles greater than 0.3mm can enter the system.

The transfer pump can deliver up to 12m head and 40m length. For greater distances, other pumps are available.

Model	Max flow	Max head	Wholesome water inlet	Maxima unit height	Maxima unit diameter
205	75 l/min.	47.7m	1/2"	1410mm	400mm
407	125 l/min.	49.4m	3/4"		

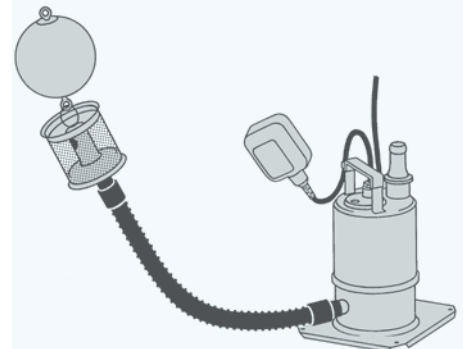

Provedo-Doc transfer pump with float switch and floating suction

Distributor:

## Rainharvesting Systems Ltd.

The Green Shop  
Calf Way, Bisley,  
Stroud, Gloucestershire GL6 7BX  
Tel: 0845 223 5430  
Fax: 01452 772008  
E-mail: sales@rainharvesting.co.uk  
Website: www.rainharvesting.co.uk