INTERNAL BREAK TANKS #1

- Designed for use in domestic and commercial gravity rainwater systems.
- Available in a range of sizes to suit a variety of applications
- Manufactured to BS4213.
- Integral calmed inlet for mains water supply.
- Mains water connection via type AA air gap. Integral tundish, solenoid and isolating valve with dirt strainer.
- Pre-fitted precision float switch for control of mains water.
- Fully compliant with current UK water regulations.
- Supplied complete with vent, overflow and warning pipes, snap-on lid and insulation jacket.








HDPE / GRP break tanks with dual inlets for rainwater harvesting systems.



Tanks are supplied complete with mains water top-up assembly, insulation jacket and all necessary fittings.

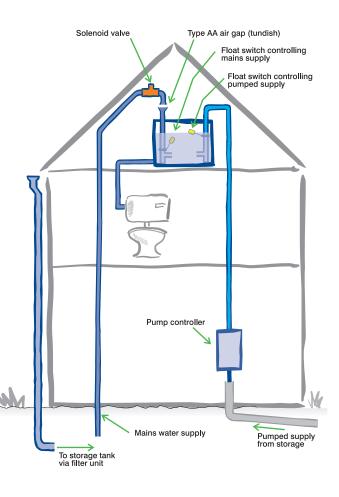



Our comprehensive range of specialist items has been developed specifically for rainwater harvesting systems. Because the range consists of separate components, it has exceptional flexibility.


These items are suitable for almost any system design, whether you're planning a system for a small house, school or large industrial or commercial premises.



We are the UK's sole supplier of *Wisy* products for rainwater utilisation

Data Sheet HT/12/01

Header tank assembly

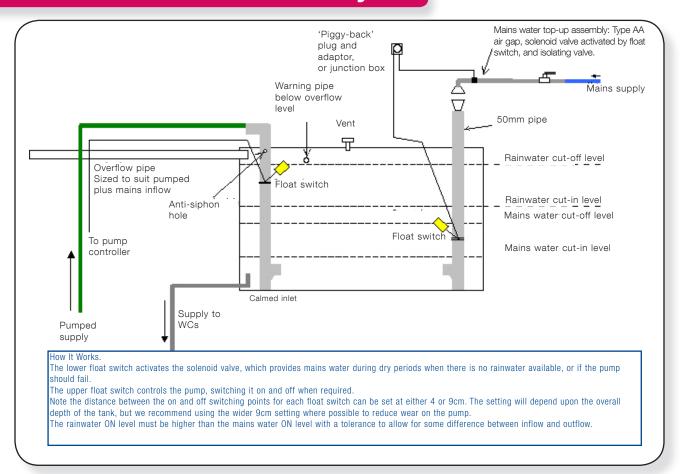



View of pre-fitted break tank showing the top-up assembly & the calmed inlets and float switches.

Designed for quick and easy installation.

Our break tanks are supplied pre-fitted and ready for use complete with special mains water top-up assembly, saving valuable installation time on site.

Simply connect the overflow pipe, mains water and supply from the rainwater pump; make the electrical connections for the float switches and solenoid valve, and the system is ready for operation.

Slze	Nominal capacity	dimensions (mm) of tank body only please make additional allowance for connecting pipes		
		Length	Width	Height
25gallons	114 litres	711	515	500
35 gallons	159 litres	750	570	570
50 gallons	227 litres	925	600	570
100 gallons	454 litres	1680	695	580

Other sizes can be made to order including large one-piece and sectional tanks to suit clients' requirements. Contact our technical department for further information.



Distributor:

Rainharvesting Systems Ltd.

The Green Shop Calf Way, Bisley,

Stroud, Gloucestershire GL6 7BX

Tel: 0845 223 5430 Fax: 01452 772008

E-mail: sales@rainharvesting.co.uk Website: www.rainharvesting.co.uk

NB continuous development may necessitate change in these details without notice E&OE.